



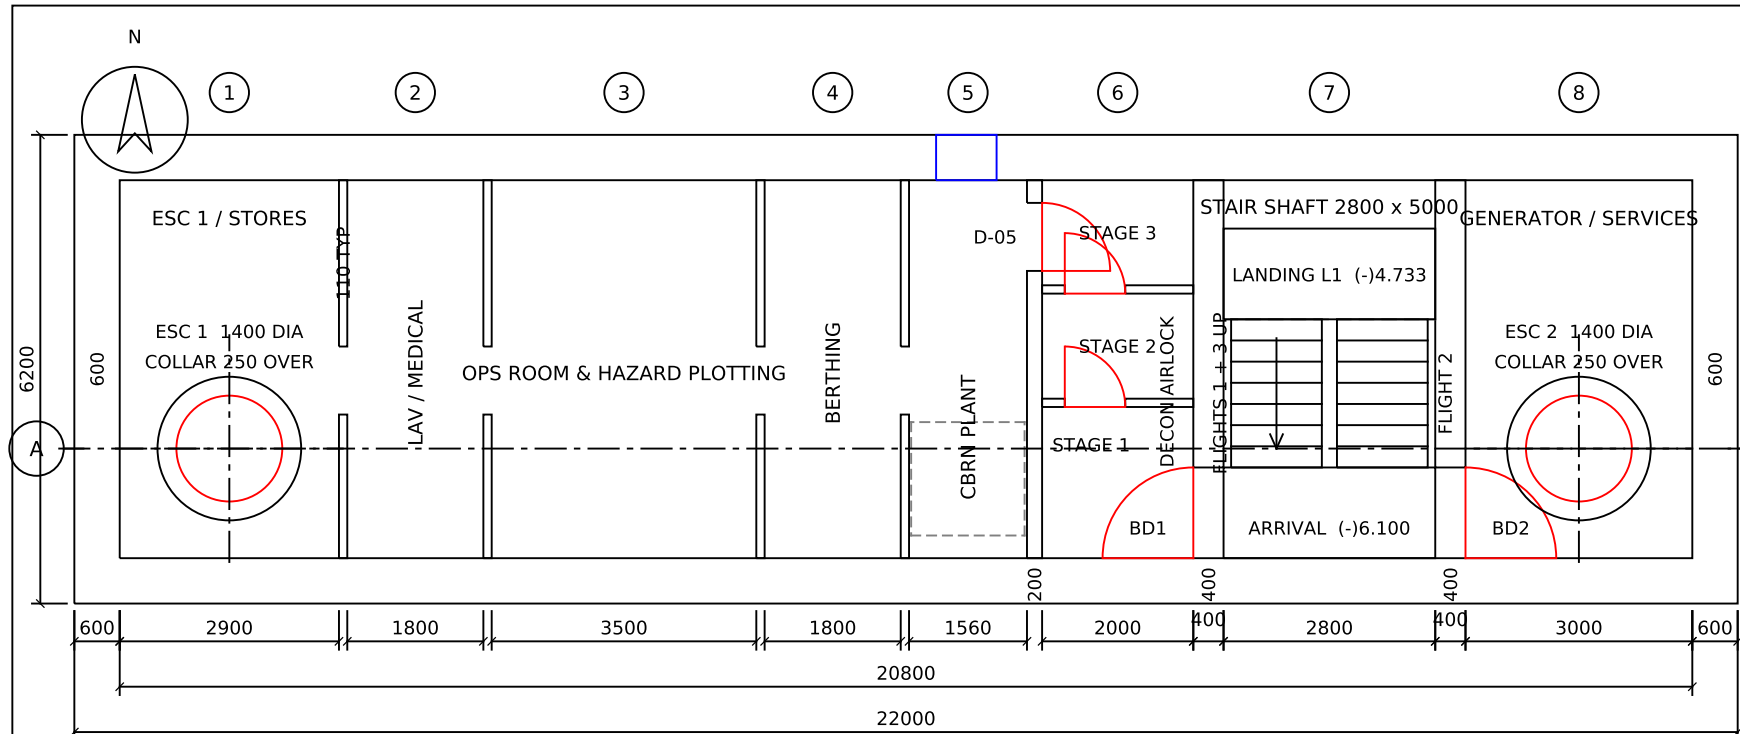


1 UNDERGROUND LEVEL PLAN (-)6.100

1 : 100 EIGHT BAYS, 22000 x 6200 EXTERNAL

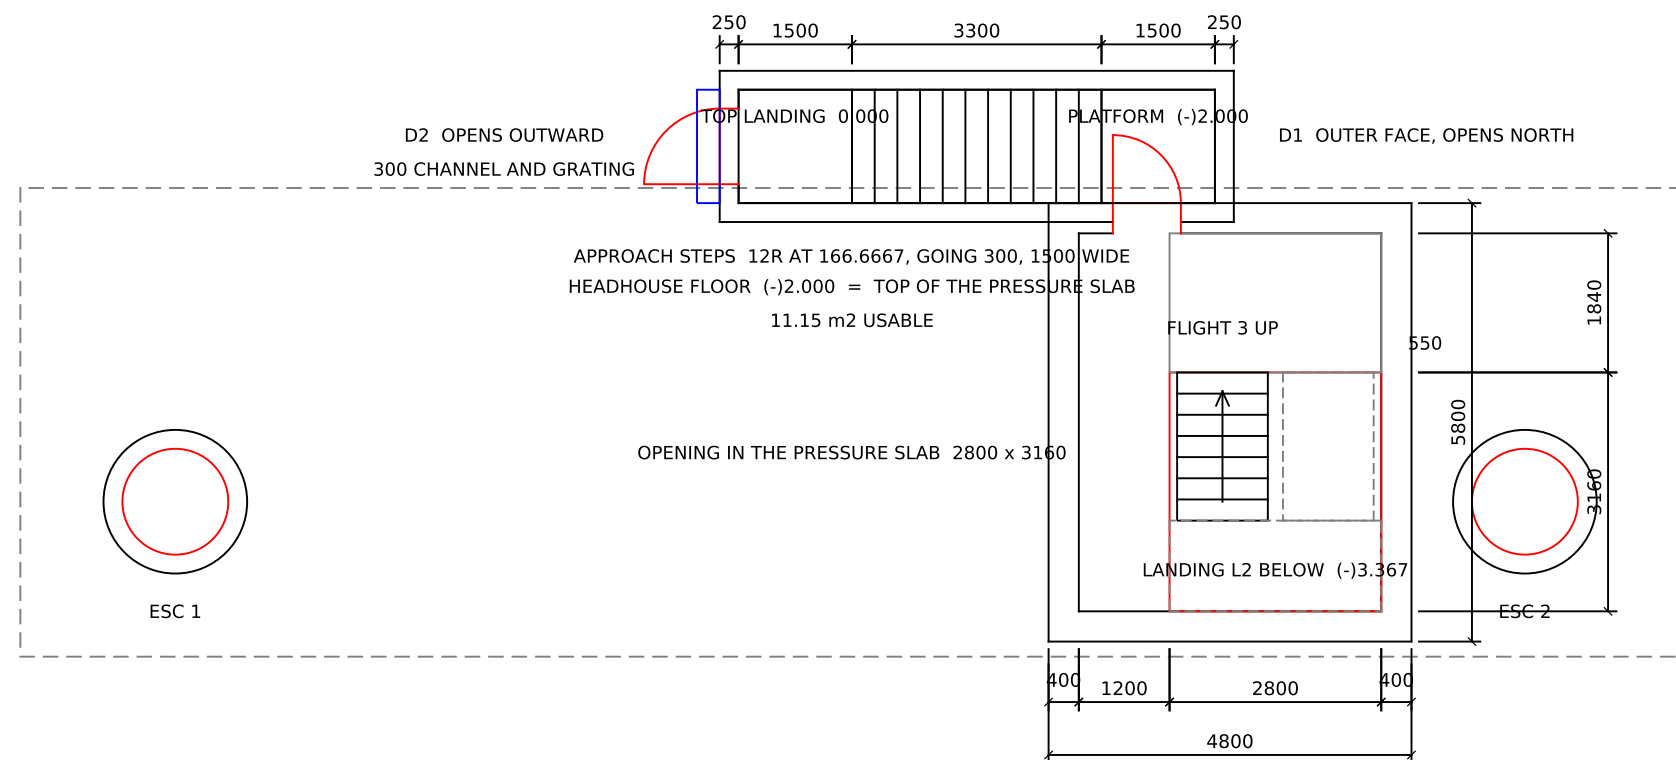

2 HEADHOUSE LEVEL PLAN (-)2.000

1 : 100 HEADHOUSE 4800 x 5800; COVERED ENTRY STAIRWELL 6800 x 2000

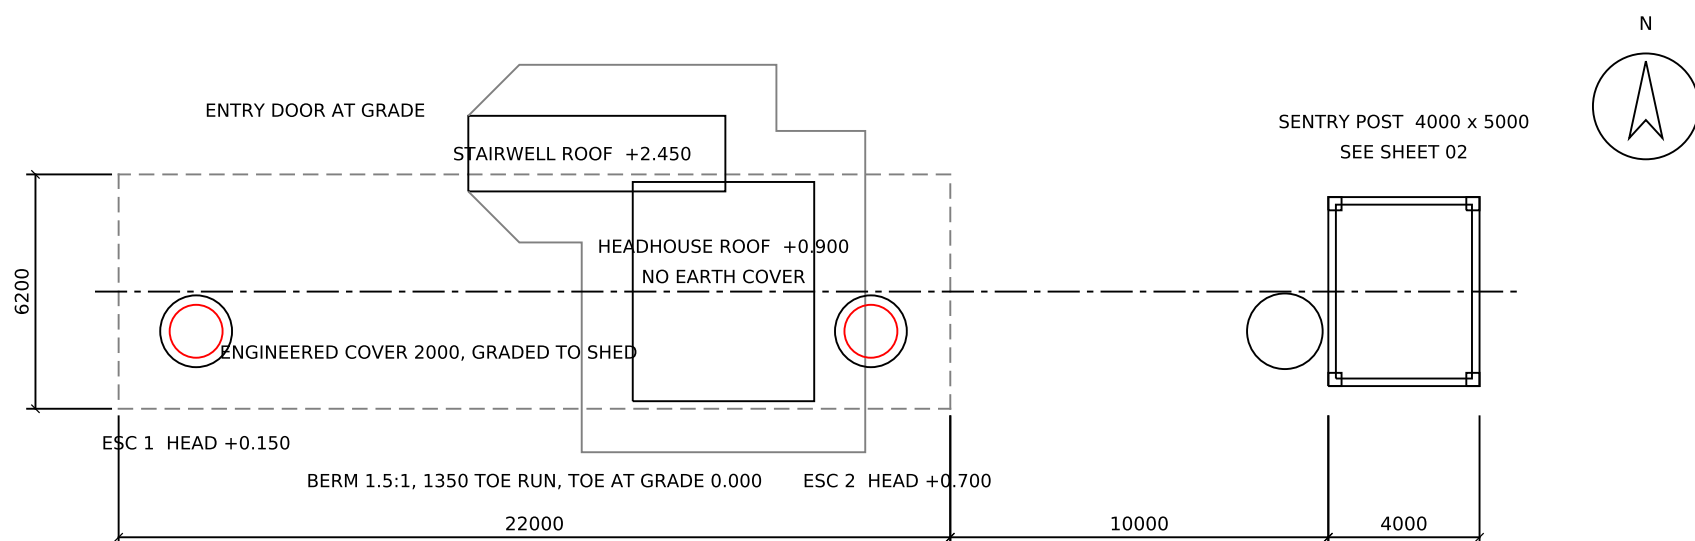

3 GROUND LEVEL PLAN AND SITE 0.000

1 : 200 SENTRY POST AT ITS SITE POSITION, X 32000 - 36000

ROOM SCHEDULE				
ROOM	BAY	X RANGE	CLEAR	USE
U-01	1	600 - 3500	2900	EMERGENCY STORES / ESC 1
U-02	2	3610 - 5410	1800	LAVATORY + MEDICAL
U-03	3	5520 - 9020	3500	OPS ROOM & HAZARD PLOTTING
U-04	4	9130 - 10930	1800	BERTHING - 9 BERTHS
U-05	5	11040 - 12600	1560	CBRN PLANT + SUMP
U-06	6	12800 - 14800	2000	DECON AIRLOCK - 3 STAGE
U-07	7	15200 - 18000	2800	STAIR SHAFT
U-08	8	18400 - 21400	3000	GENERATOR / SERVICES

DOOR SCHEDULE					
MARK	DOOR	LEAF	LEVEL	POSITION	RATING
BD1	BLAST DOOR 1	1200 x 2100	(-)6.100	W6, X 14800-15200, OPENING Y 600-1800	7 bar, GAS-TIGHT, REBOUND
BD2	BLAST DOOR 2	1200 x 2100	(-)6.100	W7, X 18000-18400, OPENING Y 600-1800	7 bar, GAS-TIGHT, REBOUND
D1	INNER SECURITY DOOR	900 x 2100	(-)2.000	HW2 HEADHOUSE NORTH WALL, X 14450-15350	NOT BLAST RATED
D2	ENTRY DOOR	1000 x 2100	0.000	ENTRY STAIRWELL HEADWALL, X 9250-9500	OPENS OUTWARD
D3	SENTRY POST DOOR	900 x 2100	+0.450	SENTRY POST, BOTH STOREYS	LINTEL L1 190 x 150 OVER
W8 PARTITIONS x 4 CARRY A PERMANENT 900 GAP AT Y 2500 - 3400 AND NO DOOR, BY DESIGN					

OPENING SCHEDULE				
MARK	OPENING	SIZE	POSITION	NOTES
ESC 1	ESCAPE SHAFT	1400 DIA CLEAR	BAY 1, (2050, 2050)	250 RC COLLAR, OD 1900. HEAD +0.150
ESC 2	ESCAPE SHAFT	1400 DIA CLEAR	BAY 8, (19900, 2050)	250 RC COLLAR, OD 1900. HEAD +0.700
VOID	STAIR VOID IN THE PRESSURE SLAB	2800 x 3160	BAY 7, X 15200-18000, Y 600-3760	CANTILEVER PAD 2800 x 1840 BEYOND
SEP	SERVICE ENTRY PLATE	800 WIDE	W2 NORTH WALL, X 11398-12198	CARRIES THE PD-05 DN50 SUMP RISING MAIN
W1	ARMoured VISION PANEL	1200 WIDE	SENTRY POST, BOTH STOREYS	1 No. GROUND, 8 No. FIRST STOREY. LINTEL L1 OVER

WALL SCHEDULE				
WALL	THK	LENGTH	EXTENT	NOTES
W1 / W2 PERIMETER, S AND N	600	22000 EACH	(-)6.100 TO (-)2.000	PROTECTIVE BOUNDARY
W3 / W4 PERIMETER, W AND E	600	6200 EACH	(-)6.100 TO (-)2.000	PROTECTIVE BOUNDARY
W5 BAY 5 / 6	200	5000	(-)6.100 TO (-)2.900	FIRE AND GAS-TIGHT ONLY, NO PRESSURE DIFFERENTIAL
W6 BAY 6 / 7	400	5000	(-)6.100 TO (-)2.900	PROTECTIVE BOUNDARY. BLAST DOOR 1
W7 BAY 7 / 8	400	5000	(-)6.100 TO (-)2.900	PROTECTIVE BOUNDARY. BLAST DOOR 2
W8 PARTITIONS x 4	110	5000 EACH	(-)6.100 TO (-)2.900	NON-STRUCTURAL. PERMANENT 900 GAP AT Y 2500-3400
HW1 - HW4 HEADHOUSE	400	4000 / 5000	(-)2.000 TO +0.900	ROOF 500 THK, SOFFIT +0.400, TOP +0.900, NO EARTH COVER
ENTRY STAIRWELL WALLS	250	6800 / 2000	RAFT TO ROOF	OUTSIDE THE PROTECTIVE BOUNDARY, NOT BLAST RATED
SENTRY POST GROUND INFILL	200 ZONE	-	+0.450 TO +3.650	190 ONE-BRICK MODULAR BRICKWORK IS 1077 IN CM 1:6

LEVEL SCHEDULE		
LEVEL	VALUE	DESCRIPTION
FINISHED SITE GRADE	0.000	CROWNED, FALLS 1:50 AWAY
SENTRY POST PARAPET TOP	+7.000	SENTRY POST
SENTRY POST ROOF	+6.700	STOREY HEIGHT 3050
SENTRY POST FIRST FLOOR	+3.650	STOREY HEIGHT 3200
ENTRY STAIRWELL ROOF AT HEAD	+2.450	SOFFIT +2.200
SENTRY POST GROUND FLOOR FFL	+0.450	= TOP OF PLINTH BEAM PB
HEADHOUSE ROOF TOP	+0.900	NO EARTH COVER; BERM GRADED TO THIS
HEADHOUSE ROOF SOFFIT	+0.400	2400 CLEAR INTERNALLY
ESC 2 HEAD	+0.700	1400 DIA CLEAR
ESC 1 HEAD	+0.150	1400 DIA CLEAR
TOP OF PRESSURE SLAB	(-)2.000	= HEADHOUSE FLOOR LEVEL
ROOF SOFFIT	(-)2.900	900 PRESSURE SLAB
INTERNAL FLOOR / TOP OF MAT	(-)6.100	3200 CLEAR HEIGHT
UNDERSIDE OF MAT	(-)6.700	600 MAT
FORMATION / UNDERSIDE OF PCC	(-)6.800	100 BLINDING
SUMP PIT INVERT	(-)7.600	PIT BASE SLAB (-)8.000
SENTRY POST FOUNDING LEVEL	(-)2.000	IN-SITU BASALT, F1 FOOTINGS

UNDERGROUND CBRN-HARDENED
BLAST-RESISTANT PROTECTIVE
STRUCTURE + SENTRY POST
PUNE, MAHARASHTRA

NOTES

- ALL DIMENSIONS ARE IN MM. ALL LEVELS ARE IN METRES RELATIVE TO FINISHED SITE GRADE 0.000, NEGATIVE DOWNWARDS.
- WRITTEN DIM TO BE FOLLOWED ONLY. DRG NOT TO BE SCALED.
- THIS DRG IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCH, STR AND SERVICES DRGS.
- THE PROTECTIVE BOUNDARY IS THE 600 PERIMETER WALLS, THE 900 PRESSURE SLAB, THE 600 MAT AND WALLS W6 AND W7 AT 400 WITH THEIR TWO BLAST DOORS. THE HEADHOUSE, THE COVERED ENTRY STAIRWELL AND THE SENTRY POST ARE OUTSIDE IT AND ARE NOT BLAST RATED.
- THE FOUR W8 PARTITIONS ARE NON-STRUCTURAL AND CARRY A PERMANENT 900 GAP AT Y 2500 - 3400. NO DOOR IS SCHEDULED IN THEM.
- BLAST DOOR 1 OPENS WEST INTO BAY 6 AND BLAST DOOR 2 OPENS EAST INTO BAY 8. BOTH ARE HINGED ON THE SOUTH JAMB OF THE 1200 OPENING.
- THE DECON AIRLOCK RUNS SOUTH TO NORTH: STAGE 1 AT BLAST DOOR 1, STAGE 3 AT THE W5 GAS-TIGHT FIRE DOOR INTO THE CBRN PLANT BAY. THE TWO INTERNAL PARTITIONS ARE 110 THICK WITH AN 800 DOOR IN EACH.
- MAIN STAIRCASE: 24 RISERS AT 170.8333, TREAD 280, 3 FLIGHTS OF 8, TOTAL RISE 4100, FLIGHT WIDTH 1200, WELL 200, HEADROOM 2533.
- THE ENGINEERED COVER OVER THE PRESSURE SLAB IS 2000 THICK IN SIX LAYERS AND IS GRADED TO SHED AT GRADE. THERE IS NO ROOF OUTLET.
- THE BERM IS GRADED 1.5:1 TO +0.900 WITH A 1350 TOE RUN, AND FALLS FROM +0.900 TO GRADE OVER THE LAST 1350 SO THE ENTRY DOOR IS CLEAR AT 0.000.
- THIS DRG HAS BEEN PREPARED IN ACCORDANCE WITH EXISTING CODES, NBC OF INDIA 2016, SOA 2009 AND SEISMIC LOADS.
- CONTRACTOR TO CHECK AND VERIFY THE DRG BEFORE EXECUTION.

UNDERGROUND LEVEL PLAN, HEADHOUSE LEVEL PLAN & GROUND LEVEL PLAN

CBRN HARDENED UG OPS ROOM

SHEET 01

Project number	01
Date	18 SEP 2026
Drawn by	SYN 01
Checked by	DR IR CHAUDHARI

ARCH001

Scale	As indicated
-------	--------------