



224 DAYS 02-11-26 TO 26-07-27

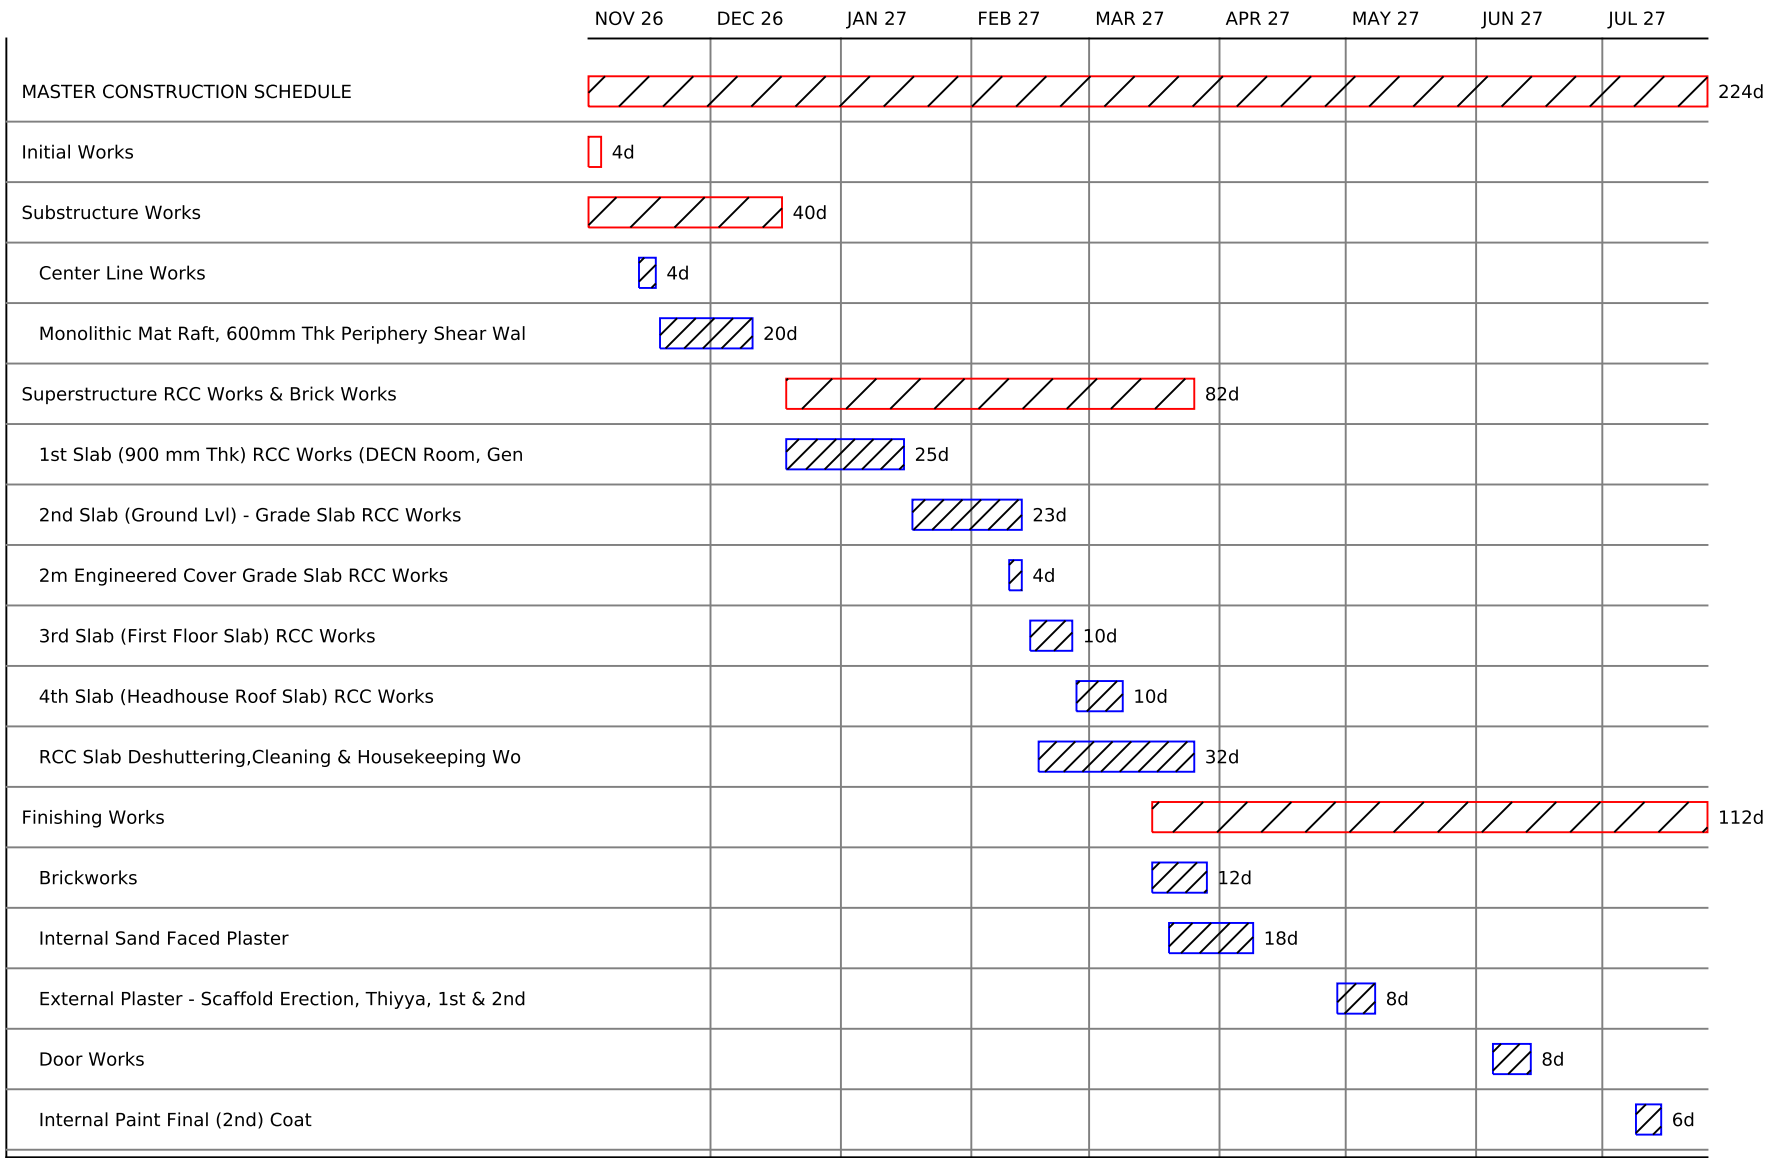

# 1 MASTER CONSTRUCTION PROGRAMME - BAR CHART

NOT TO SCALE 18 SUMMARY ACTIVITIES OF THE 130 IN THE REVISED SCHEDULE

TOTAL BASIC COST Rs 2,42,20,254 IN 38 MEASURED ITEMS

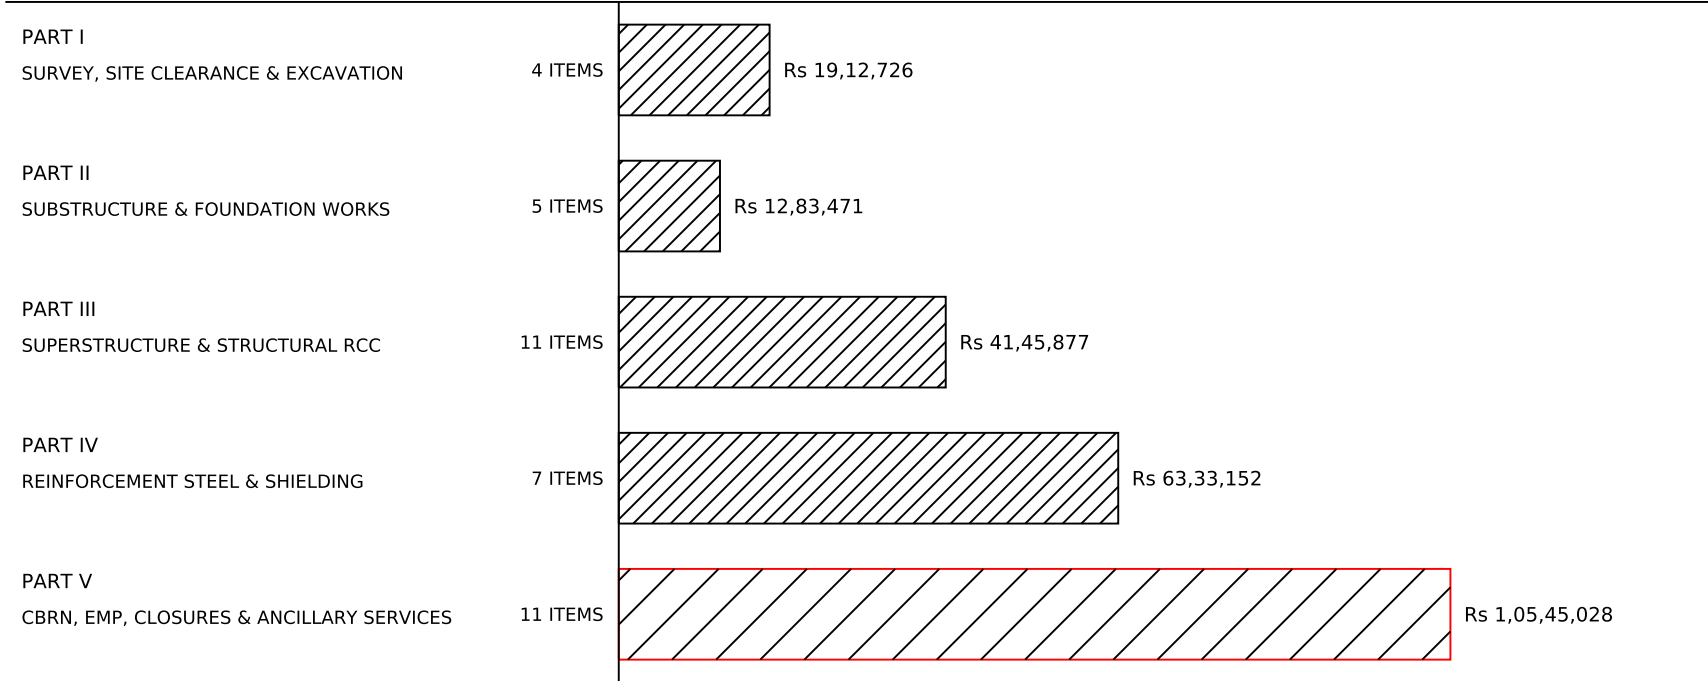

FINAL PROJECT COST Rs 2,97,90,913

# 2 COST DISTRIBUTION BY BILL PART

NOT TO SCALE BARS IN PROPORTION TO AMOUNT

## COST SUMMARY

| COST HEAD                                      | BASIS             | AMOUNT Rs   |
|------------------------------------------------|-------------------|-------------|
| Total Basic Cost                               | Subtotal Packages | 2,42,20,254 |
| Contingencies                                  | 3.0%              | 7,26,608    |
| Water & Electricity Provisions                 | 1.0%              | 2,42,203    |
| Specialist CBRN / EMP & Engineering Consultant | 6.0%              | 14,53,215   |
| Site Supervision & Quality Assurance           | 2.0%              | 4,84,405    |
| Statutory Clearances & Liaisoning              | 1.0%              | 2,42,203    |
| Contractor's Overhead & Profit                 | 10.0%             | 24,22,025   |
| FINAL PROJECT COST                             | -                 | 2,97,90,913 |

## BILL OF QUANTITIES - PART SUMMARY

| PART | DESCRIPTION                              | ITEMS | AMOUNT Rs   |
|------|------------------------------------------|-------|-------------|
| I    | SURVEY, SITE CLEARANCE & EXCAVATION      | 4     | 19,12,726   |
| II   | SUBSTRUCTURE & FOUNDATION WORKS          | 5     | 12,83,471   |
| III  | SUPERSTRUCTURE & STRUCTURAL RCC          | 11    | 41,45,877   |
| IV   | REINFORCEMENT STEEL & SHIELDING          | 7     | 63,33,152   |
| V    | CBRN, EMP, CLOSURES & ANCILLARY SERVICES | 11    | 1,05,45,028 |

## PRINCIPAL BILL ITEMS BY VALUE

| ITEM                                            | UNIT  | QTY    | AMOUNT Rs |
|-------------------------------------------------|-------|--------|-----------|
| NBC Collective Protection Trains (2 x 300 m³/h) | Set   | 2      | 37,72,576 |
| Blast Doors 1 & 2 (≥7 bar, Rebound-Rated)       | Set   | 2      | 25,50,400 |
| Pressure Roof Slab Rebar (T25 / T12)            | Tonne | 23.22  | 20,11,392 |
| Perimeter & Shear Wall Rebar (T16 / T20)        | Tonne | 17.85  | 15,70,284 |
| Mass Excavation in Basalt / Murum (~6.8 m)      | Cum   | 1539   | 15,12,570 |
| Casting 600 mm Perimeter & Shear Walls (M35)    | Cum   | 132.61 | 12,36,918 |
| Mat Raft & Haunch Diagonal Rebar                | Tonne | 13.14  | 11,36,160 |
| Casting 900 mm Pressure Roof Slab (M35)         | Cum   | 114.72 | 10,73,657 |
| Emergency Exit Hatches (900 mm Clear, 621 kPa)  | Set   | 2      | 9,22,248  |
| Sealed Zone-2 Welded EMP Enclosure (3×3×2.4 m)  | Item  | 1      | 8,94,496  |
| Monolithic Mat Raft Casting (M35)               | Cum   | 81.84  | 7,62,082  |
| Generator Blast Valves BV-4 & BV-5 (DN350)      | Set   | 2      | 6,50,368  |

## PROGRAMME PHASES

| PHASE                                  | DURATION | START    | FINISH   |
|----------------------------------------|----------|----------|----------|
| Initial Works                          | 4 days   | 02-11-26 | 05-11-26 |
| Substructure Works                     | 40 days  | 02-11-26 | 18-12-26 |
| Superstructure RCC Works & Brick Works | 82 days  | 19-12-26 | 26-03-27 |
| Finishing Works                        | 112 days | 16-03-27 | 26-07-27 |

## WHAT THE REVISED BILL CARRIES

| ITEM                 | AS MEASURED     | QUANTITY  | NOTES                                                |
|----------------------|-----------------|-----------|------------------------------------------------------|
| BURSTER SLAB         | 200 THK M30     | 38.40 m3  | REDUCED FROM 300 THK M35 AND 57.60 m3                |
| SENTRY POST          | RC FRAME ONLY   | -         | THE BRICK INFILL IS MEASURED SEPARATELY AS BRICKWORK |
| ESCAPE SHAFT COLLARS | 250 RC, OD 1900 | 6.285 m3  | ADDED AS A MEASURED LINE                             |
| GENERATOR            | 15 kVA          | 1 No.     | ADDED AS A VISIBLE LINE                              |
| CONCRETE TOTAL       | -               | 467.59 m3 | = THE SUM OF ITS OWN LINES                           |
| PROGRAMME WORDING    | 13 ACTIVITIES   | -         | 2.0 m COVER, 900 SLAB AND THE POST-M1 BOX SIZE       |

UNDERGROUND CBRN-HARDENED  
BLAST-RESISTANT PROTECTIVE  
STRUCTURE + SENTRY POST  
PUNE, MAHARASHTRA

## NOTES

- ALL AMOUNTS ARE IN INDIAN RUPEES.
- ALL DURATIONS ARE IN WORKING DAYS. WRITTEN FIGURES TO BE FOLLOWED ONLY. THE BAR CHART IS NOT TO BE SCALED FOR A DATE.
- THIS DRG IS TO BE READ IN CONJUNCTION WITH THE FULL BILL OF QUANTITIES, THE COST ESTIMATE AND THE MASTER CONSTRUCTION SCHEDULE.
- FINAL PROJECT COST Rs 2,97,90,913, BUILT UP FROM A TOTAL BASIC COST OF Rs 2,42,20,254 IN FIVE BILL PARTS.
- MASTER CONSTRUCTION PROGRAMME 224 DAYS, 02-11-26 TO 26-07-27, IN FOUR PHASES: INITIAL WORKS, SUBSTRUCTURE, SUPERSTRUCTURE AND FINISHING.
- THE BURSTER SLAB IS 200 THK M30 AND 38.40 CUM. THE SENTRY POST IS MEASURED AS AN RC FRAME WITH ITS BRICK INFILL MEASURED SEPARATELY AS BRICKWORK.
- THE TWO ESCAPE SHAFT COLLARS, 250 RC AT OD 1900, ARE MEASURED AS A LINE AT 6.285 CUM, AND THE 15 kVA GENERATOR IS A VISIBLE LINE.
- THE CONCRETE TOTAL IS 467.59 CUM, WHICH IS THE SUM OF ITS OWN LINES.
- AMOUNTS ARE FROM THE REVISED BILL OF QUANTITIES. A LINE SHOWN NIL IS NOT PRICED IN IT.
- CONTRACTOR TO CHECK AND VERIFY THE FIGURES BEFORE TENDER.

## WORKS MANAGEMENT - MASTER PROGRAMME AND BILL OF QUANTITIES

## CBRN HARDENED UG OPS ROOM

## SHEET 13

|                |                 |
|----------------|-----------------|
| Project number | 01              |
| Date           | 18 SEP 2026     |
| Drawn by       | SYN 01          |
| Checked by     | DR IR CHAUDHARI |
| WMS013         |                 |
| Scale          | Not to scale    |